


SCHEME OF AUTOMATIC BIOFIREPLACE SMART FIRE A6 1100 MM

SIDE VIEW



Technical drawing of the Wild Flame fireplace unit. The unit is rectangular with a width of 1100 and a height of 350. The front panel features a central horizontal glass door with a handle. Below the door are two rectangular air vents. The unit is labeled "WILD FLAME" on the left side. The drawing includes dimension lines and labels: 1100 (width), 350 (height), A (height of the top panel), 5 (height of the bottom panel), 6 (height of the air vents), 3 (height of the main body), and 1 (height of the top panel). A power cord is shown on the left side, connected to a plug.

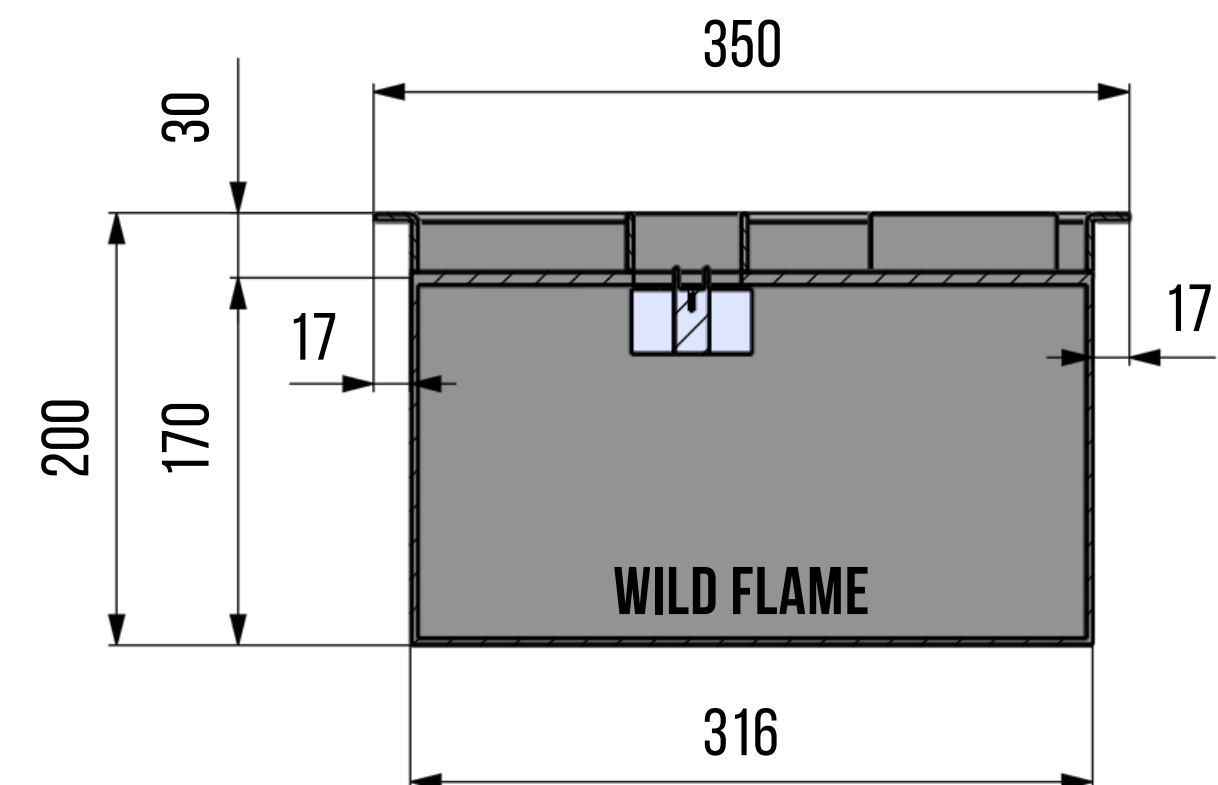

SCHEME OF SMART FIRE A6


1100 X 350 X 200 MM

WWW.WILDFLAME.NL

NO:	NAMES
1	FRONT PANEL OF AUTOMATIC BIOFIREPLACE
2	DOUBLE-WALL HULL
3	FILLING CAP
4	FIRE LINE
5	POWER CABLE (220V)
6	CONTROL PANEL

SCHEME OF NICHE FOR AN AUTOMATIC BIOFIREPLACE SMART FIRE A6 1100 MM (FLUSH - MOUNTED)

TOP VIEW

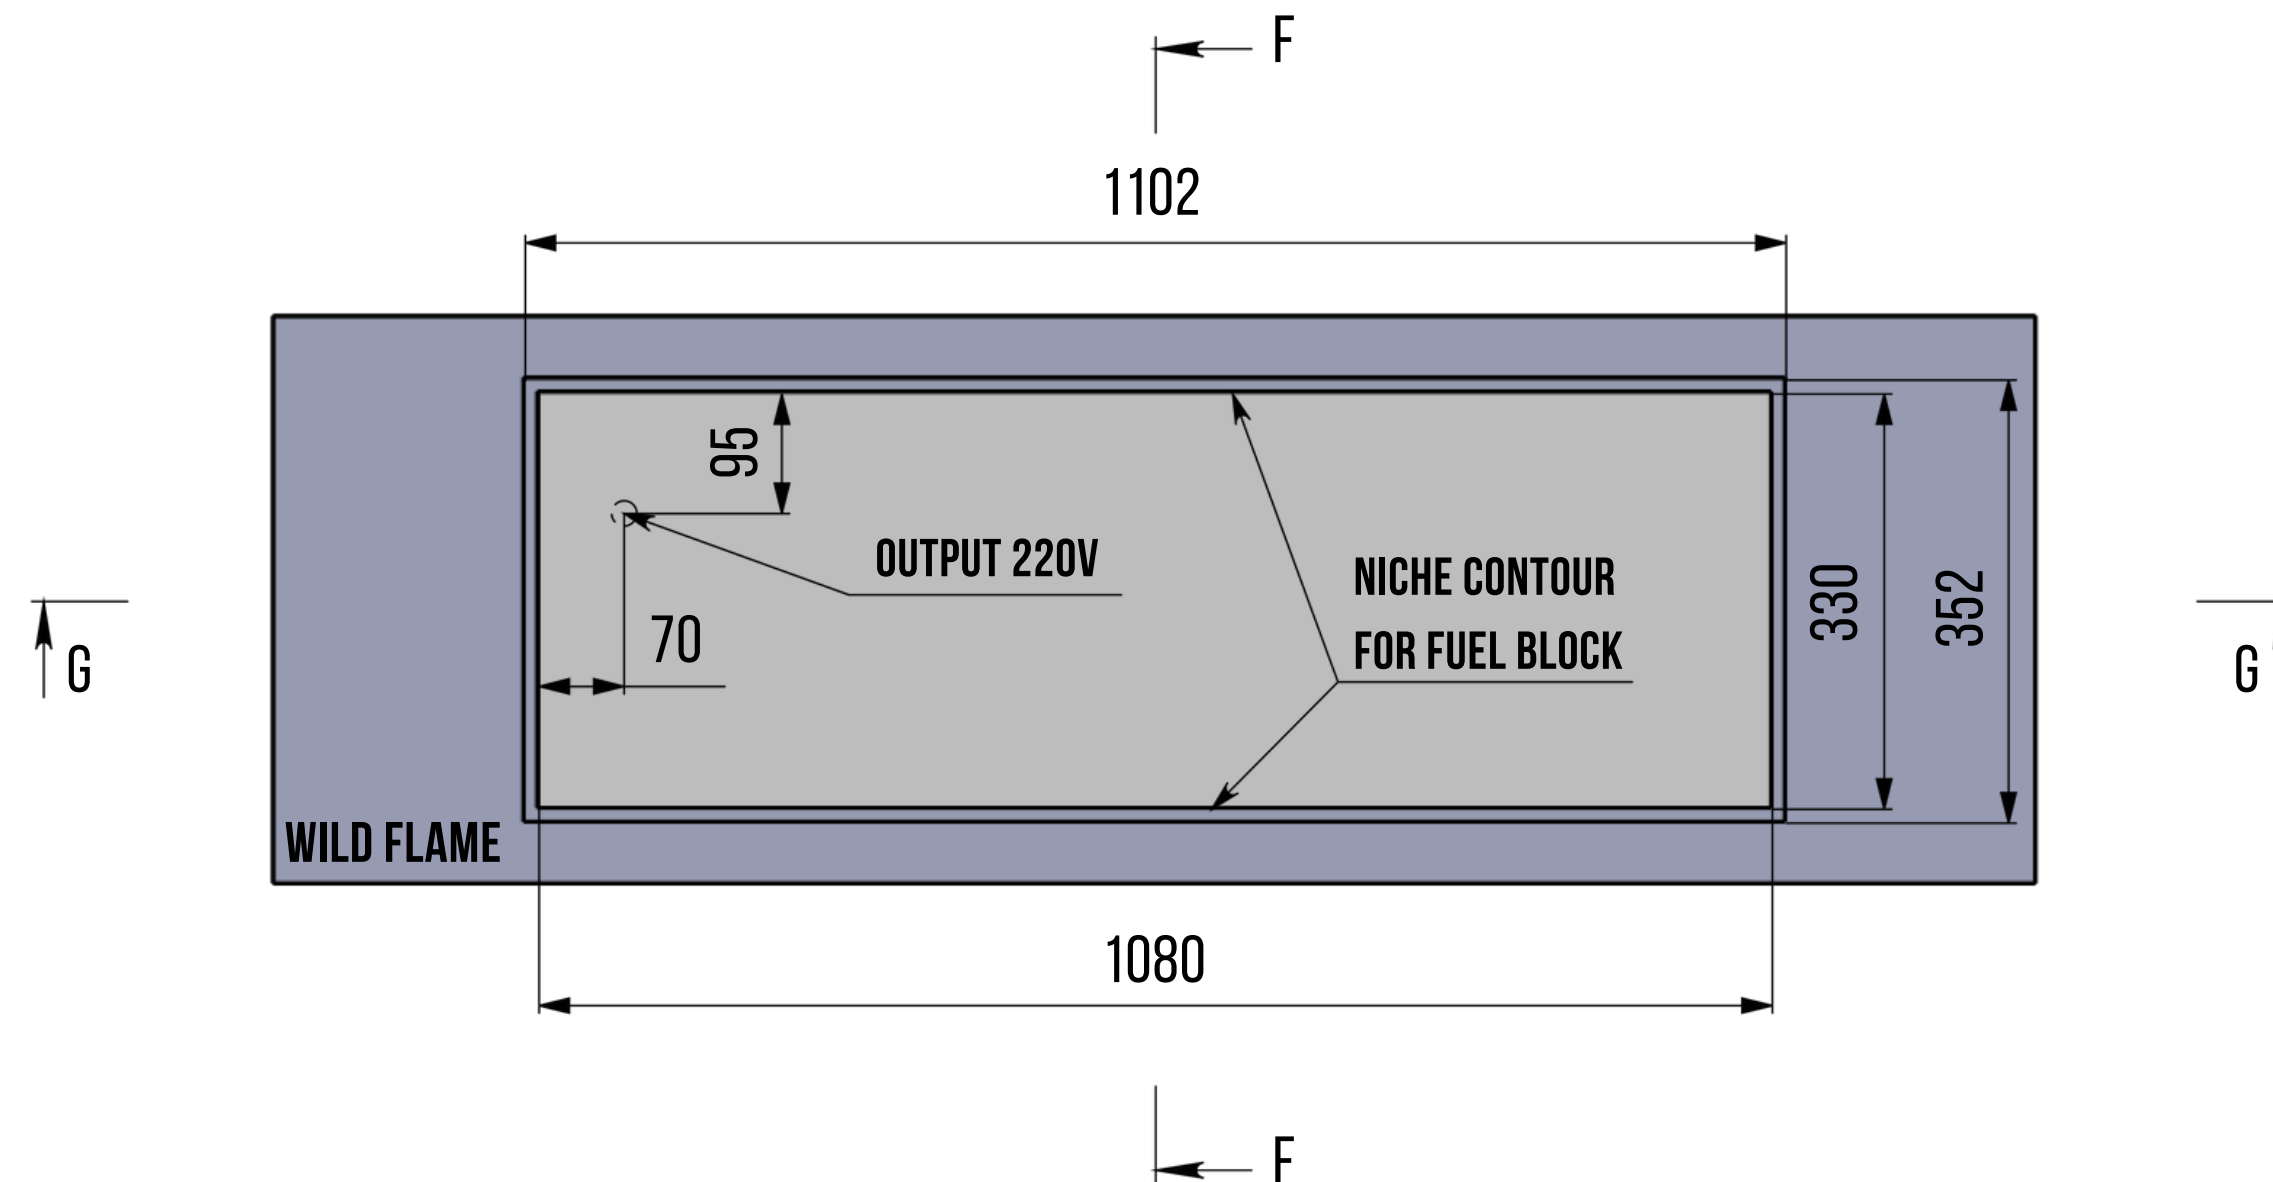

NICHE DIMENSIONS FOR EMBEDDING THE FUEL BLOCK:

NICHE LENGTH - 1080 MM

NICHE WIDTH - 330 MM

NICHE DEPTH - 230 MM


DIMENSIONS OF THE SEAT FOR THE FRONT PANEL OF THE FUEL BLOCK:

NICHE LENGTH - 1102 MM


NICHE WIDTH - 352 MM

NICHE DEPTH - 4 MM

FRONT VIEW

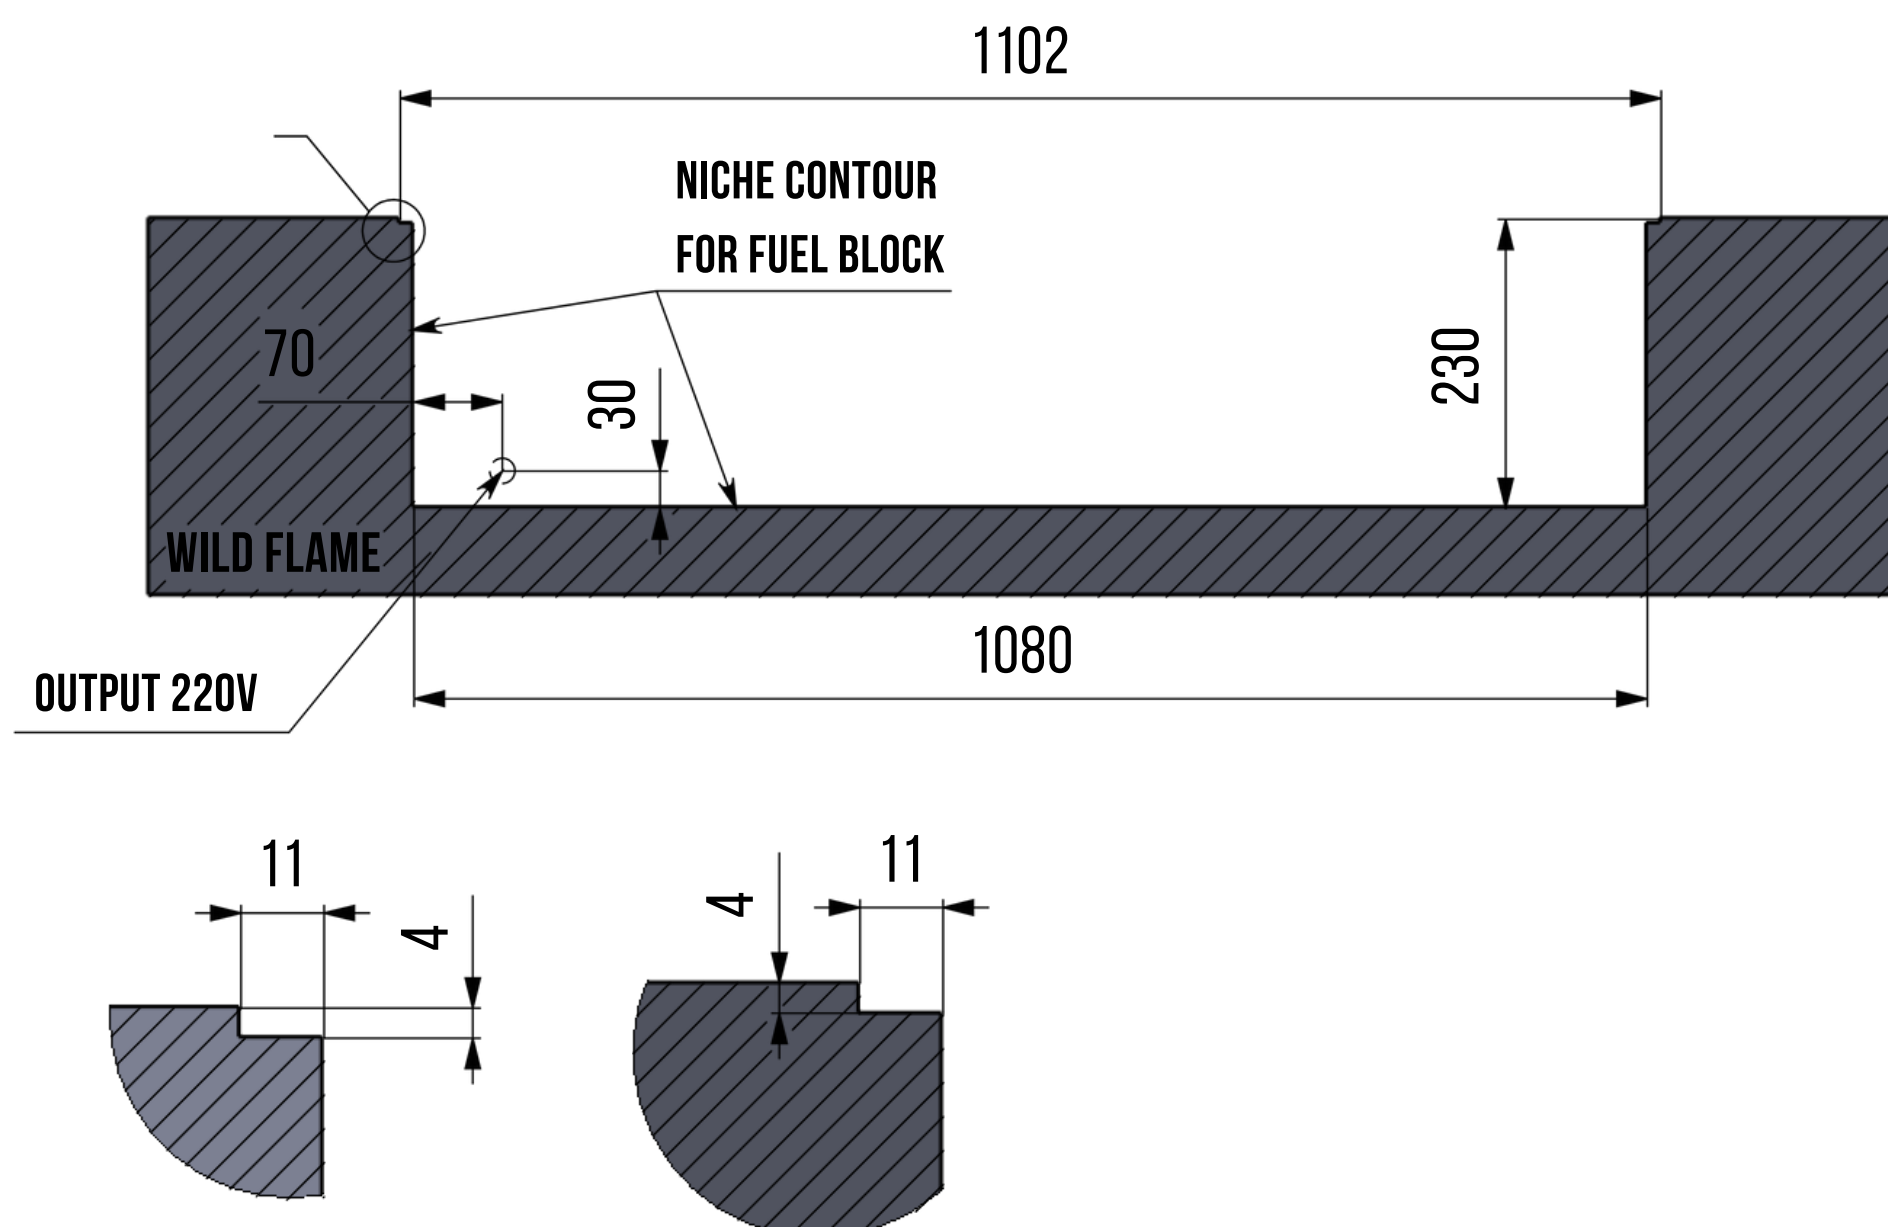




SIDE VIEW

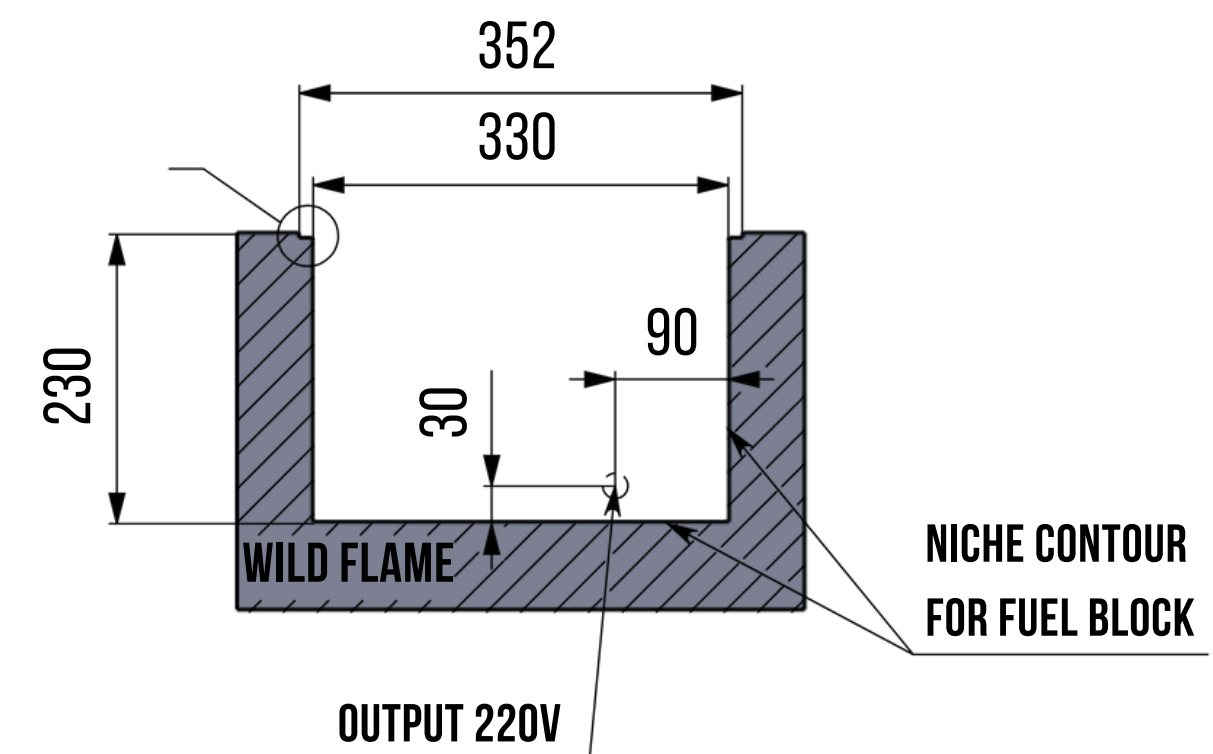

WILD FLAME

DUTCH MANUFACTURER

SCHEME OF AUTOMATIC BIOFIREPLACE SMART FIRE A6 1100 MM

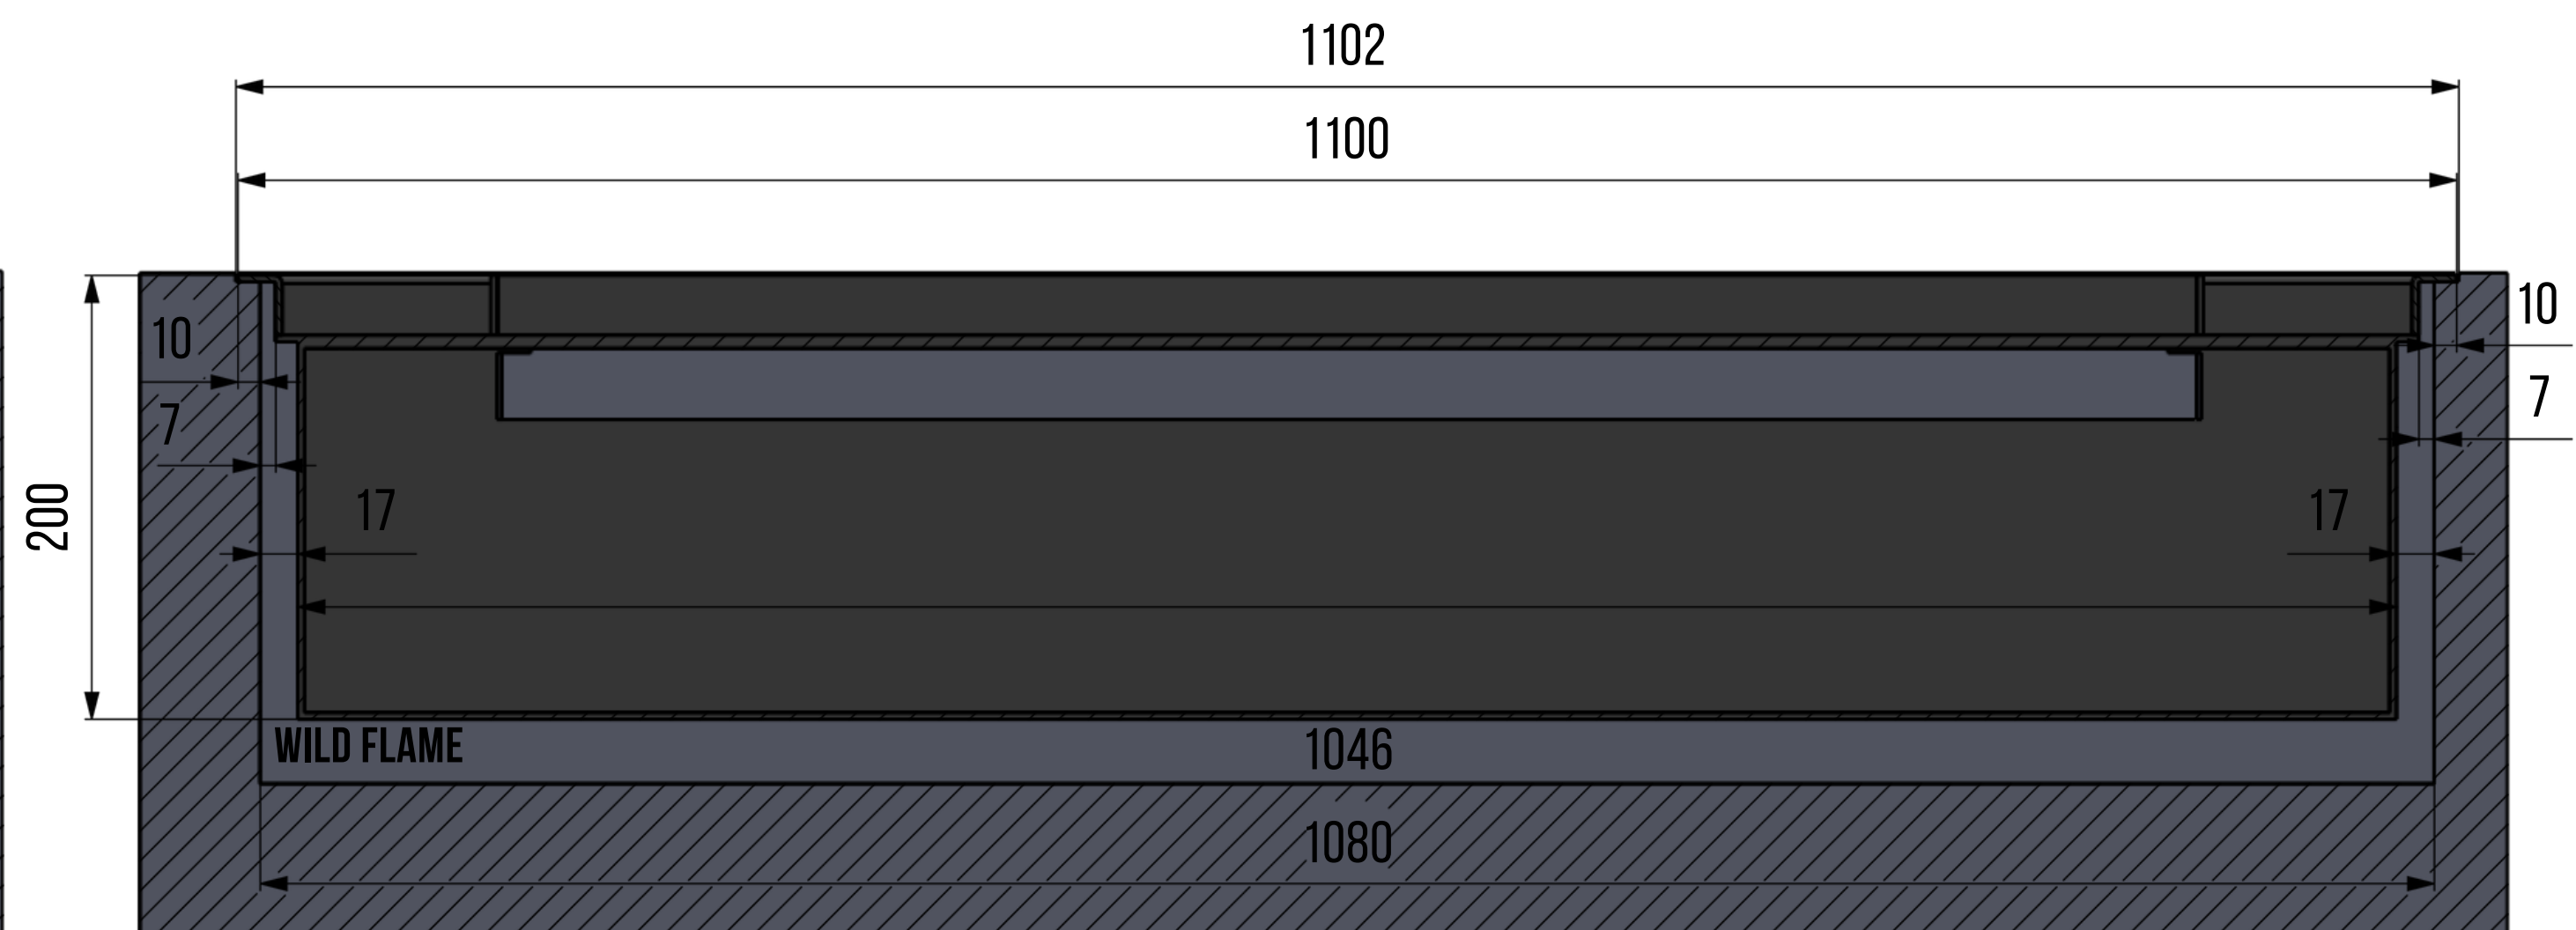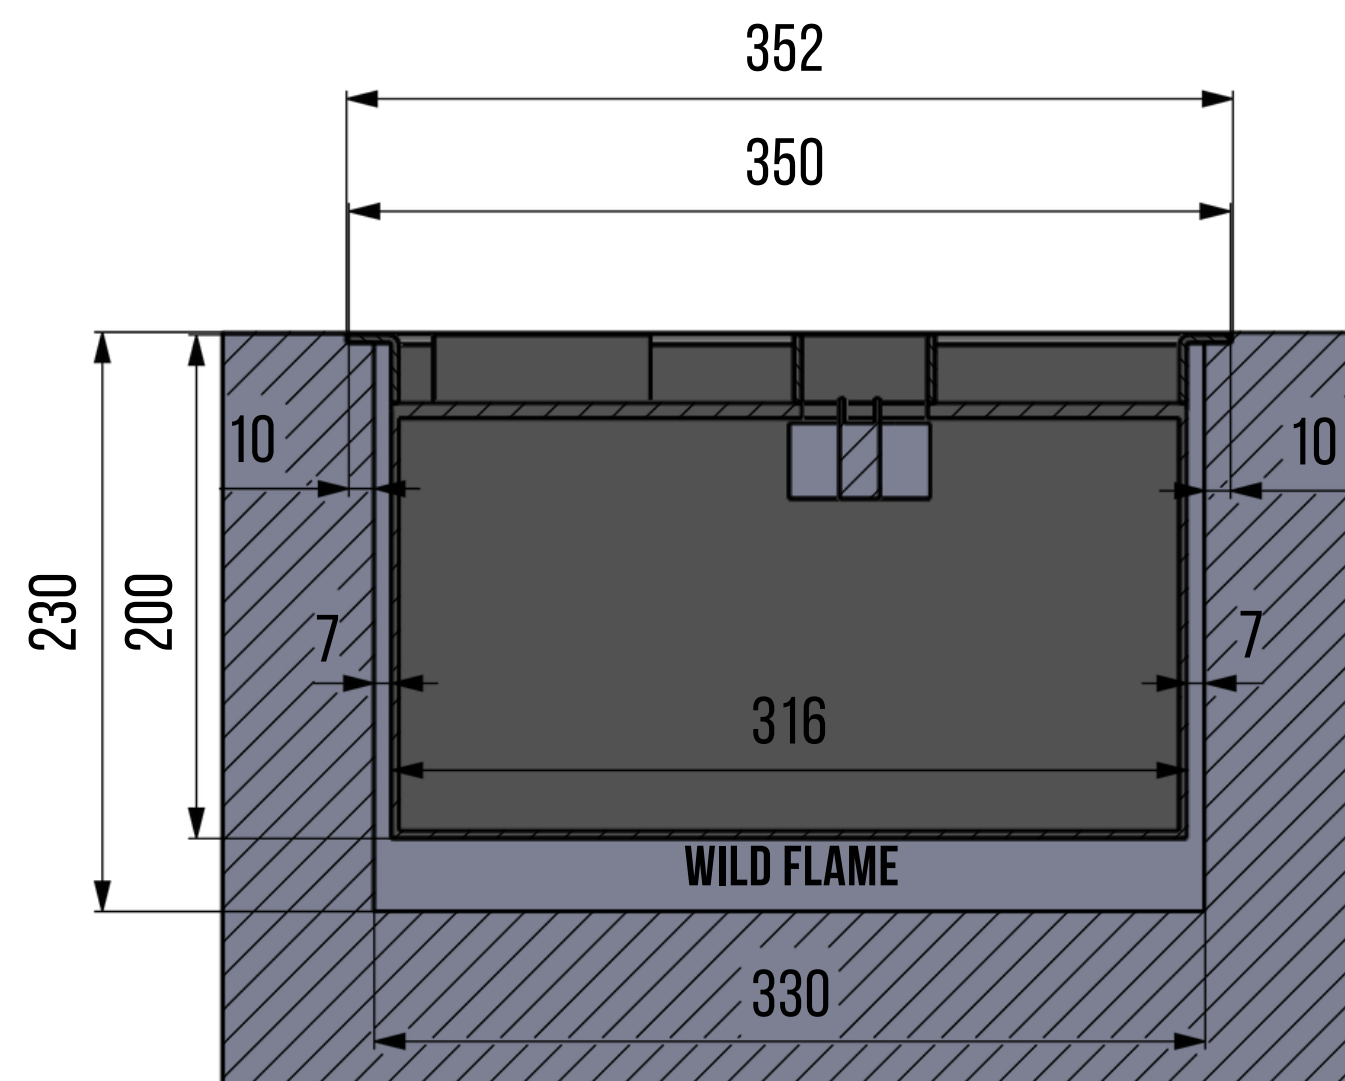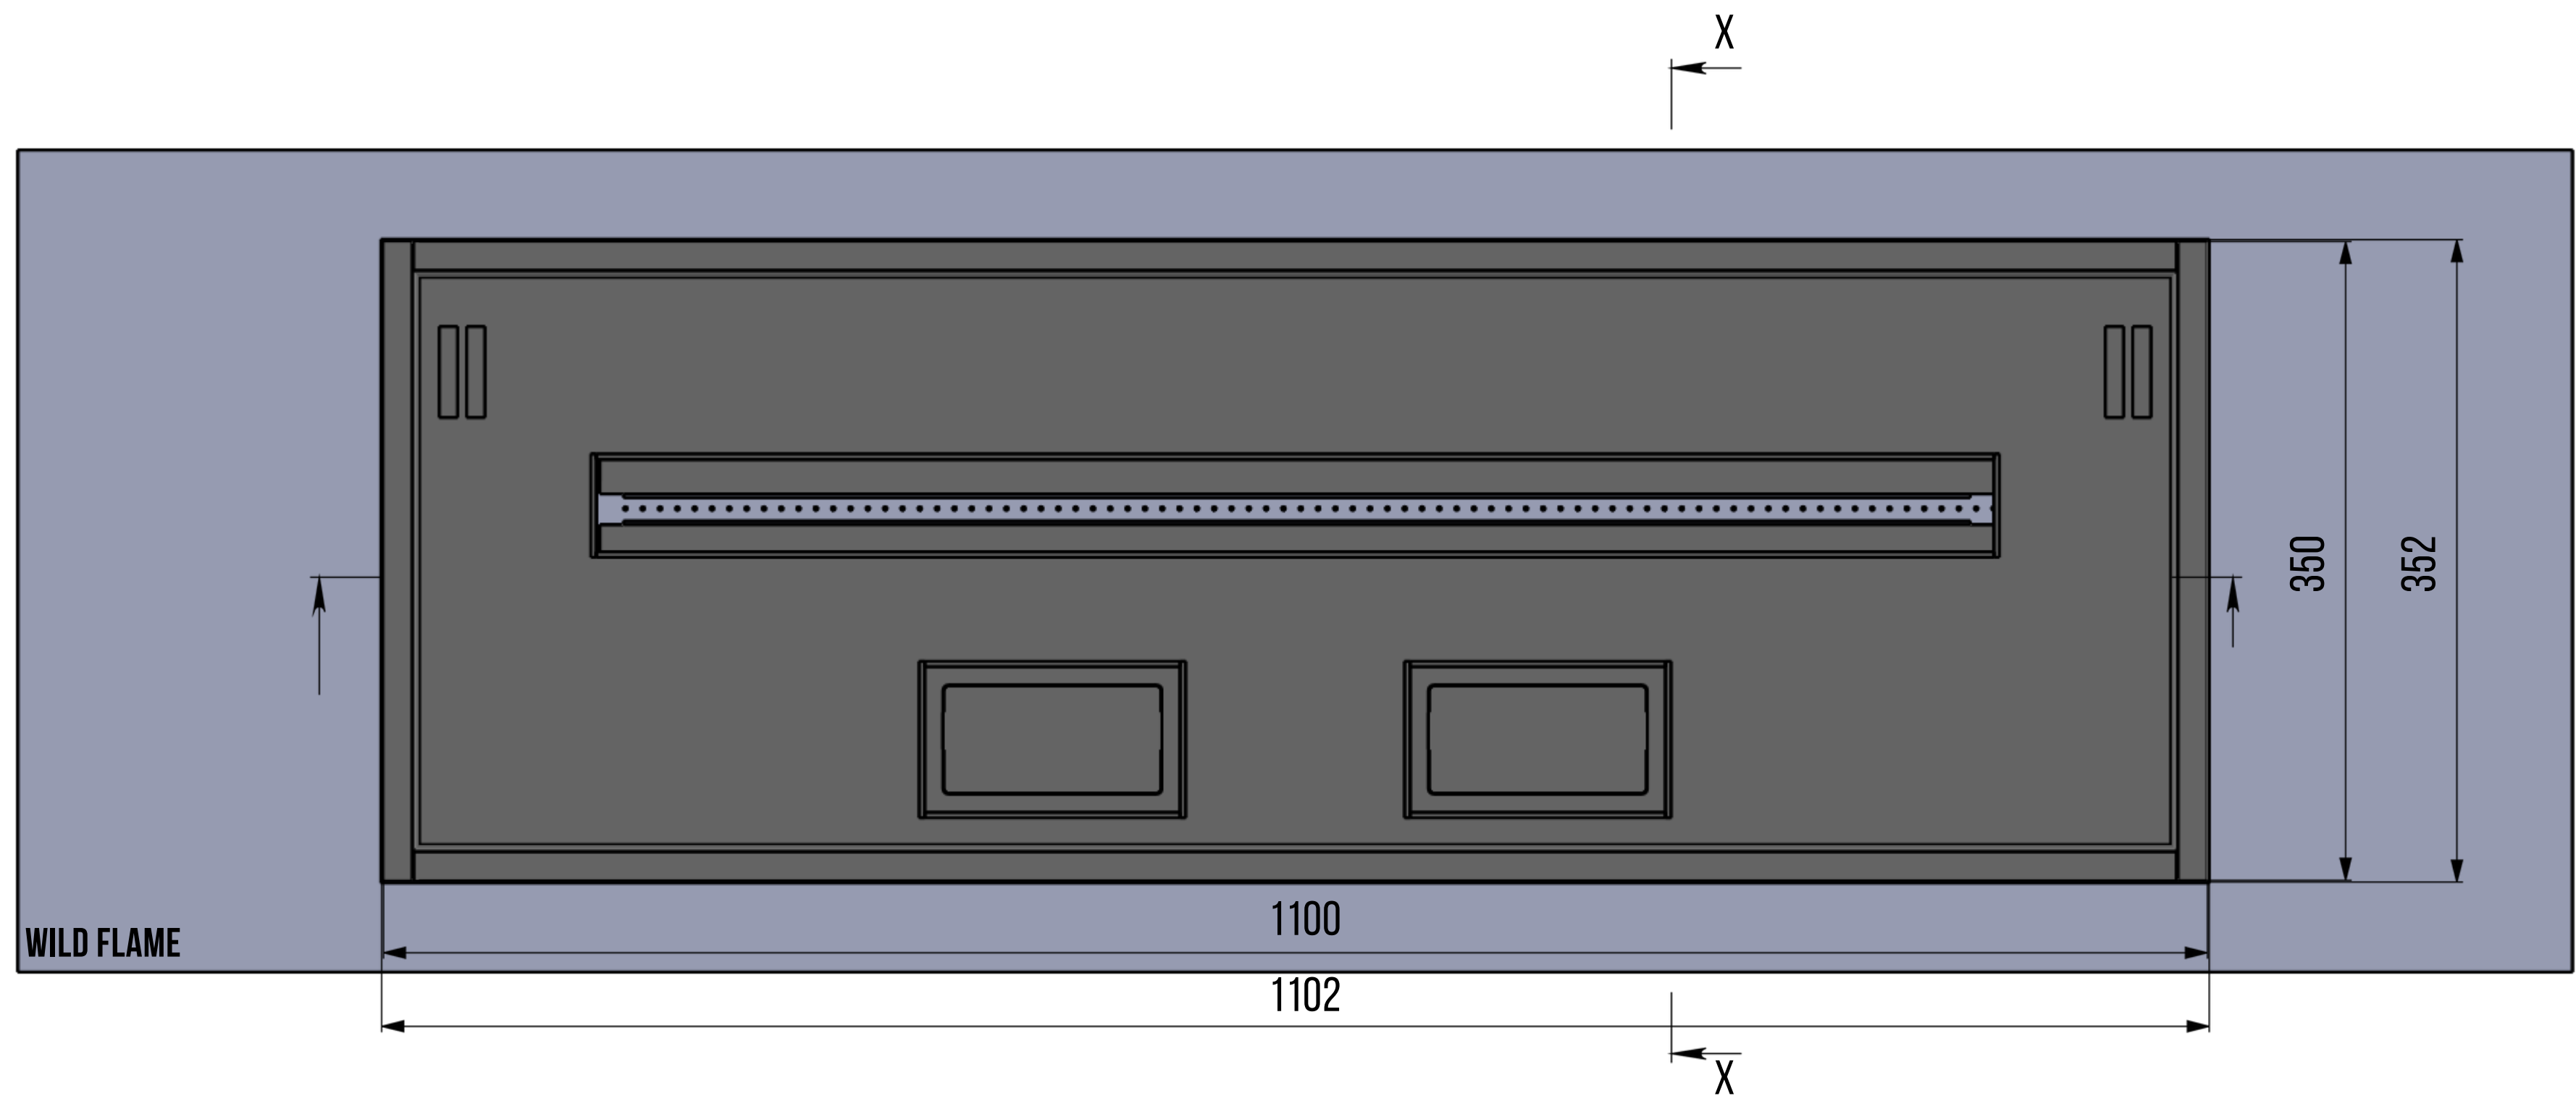


SCHEME OF A NICHE FOR SMART FIRE A6 BIOFIREPLACE

WILD FLAME

DUTCH MANUFACTURER

SCHEME OF AUTOMATIC BIOFIREPLACE SMART FIRE A6 1100 MM

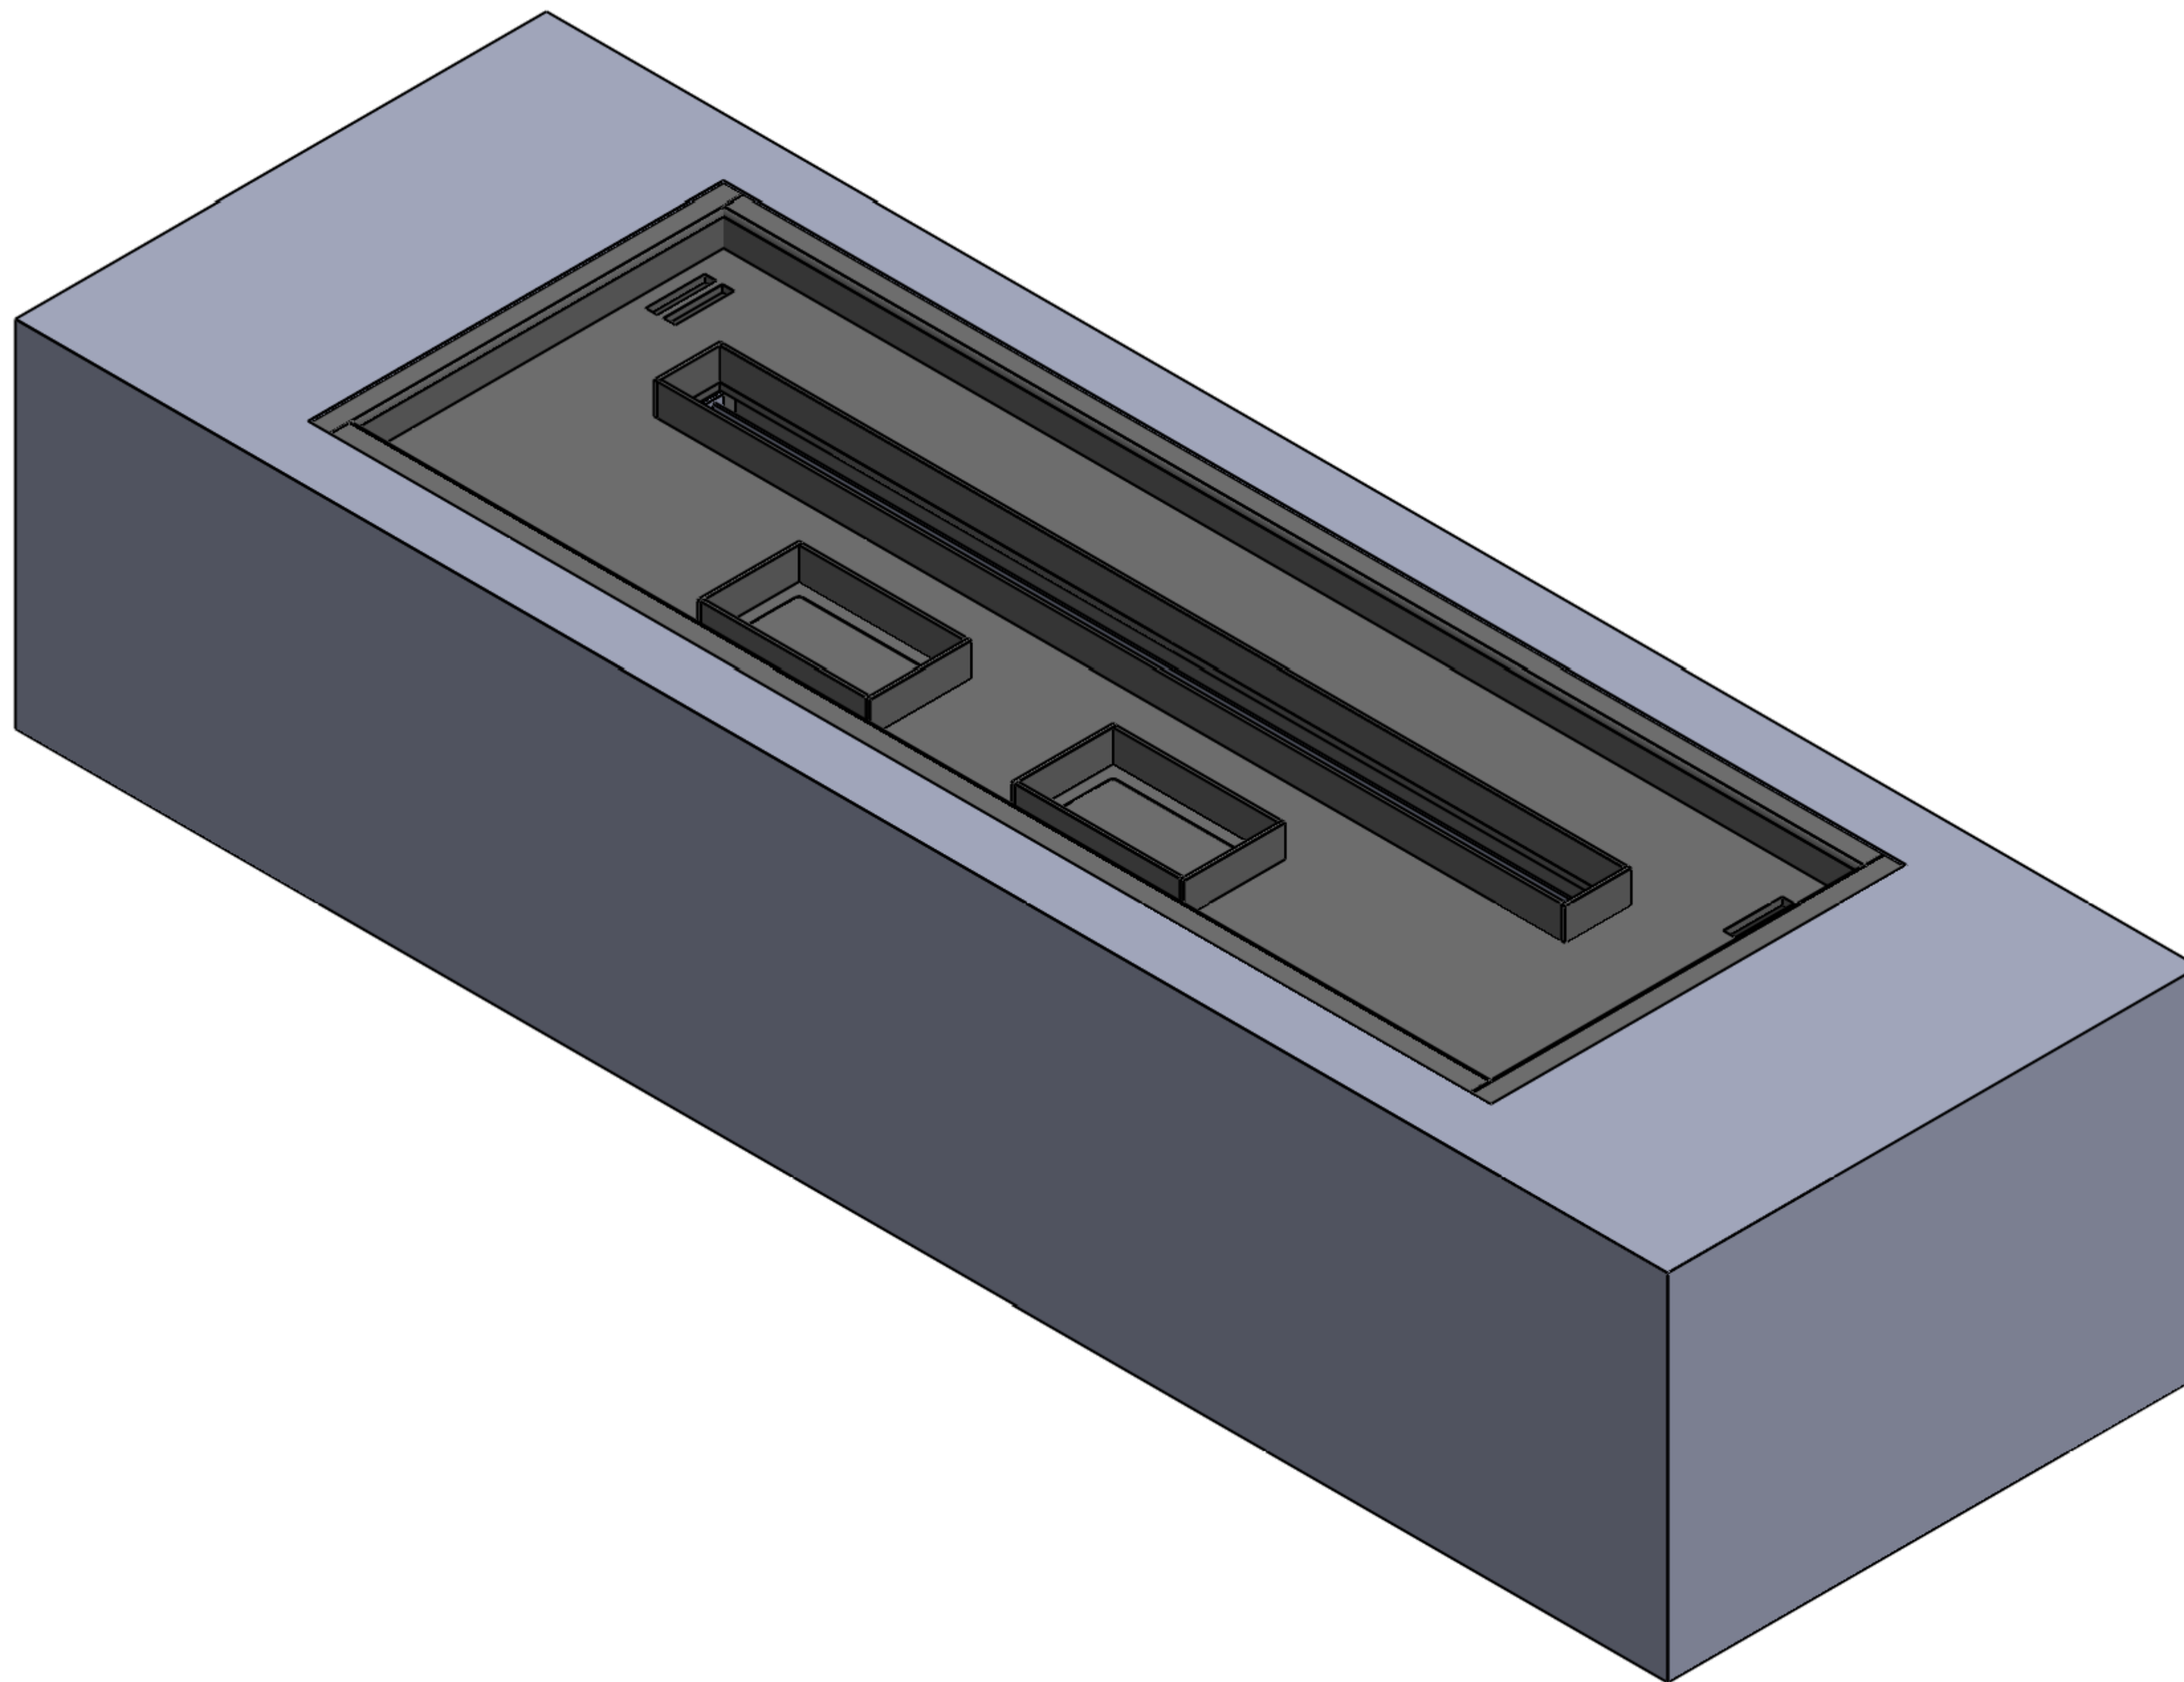

Dimensiones: L1100 x An350 x Al200 – Línea de fuego: 900 mm (posibilidad de ajustar las dimensiones hasta 600 cm)
Capacidad del depósito de combustible: 5,6 litros (posibilidad de ajustar el depósito)
Ajuste de la altura de la llama: 2 posiciones (posibilidad de ajuste)
Autonomía de combustión: hasta 6 horas (en el nivel más bajo)
Tipo de combustible: Bioetanol al 96 % (RECOMENDACIÓN: Wild Flame)
Panel de control: oculto; se abre presionando la compuerta
Cristal protector tintado: 2 piezas con soportes magnéticos
Materiales: metal, acero inoxidable
Sistema de llenado automático: sí
Repostaje: bomba automática
Encendido automático: sí
Altura de la llama: hasta 20 cm
Potencia calorífica: 9,8 kW
Mando a distancia: sí
Peso: 47 kg
Garantía: 2 años

EL SET INCLUYE: Troncos cerámicos artesanales sostenibles, virutas decorativas y 2 cristales tintados con soportes magnéticos

7 sensores de seguridad:

1. Sensor de CO2
2. Sensor de temperatura
3. Sensor de anomalías
4. Sensor sísmico
5. Sensor de desbordamiento
6. Sensor de presión de combustible
7. Sensor de seguridad del sistema de llenado